# TORK Hydraulics



4WRA series proportional directional control valves are controlled by the proportional electromagnet, It is used to control the liquidity's flow and direction.


#### Ordering details

	4WRA	6	Е	2X	G24
	Sort	Nominal size	symbols	Series number	Input voltage
	Proportional directional control valve	6:NG6 10:NG10	See symbols list		G24:DC24


### Technical specification

N	lodel	4WRA6	4WRA10			
	flow rate /min)	26	60			
Working pressure (MPa)		A,B,P port 25	A,B,P port 25			
		T port 16	T port 16			
Weight	Single solenoid	1.9	2.6			
(kgs)	double solenoids	3.8	4.5			


## Symbol list

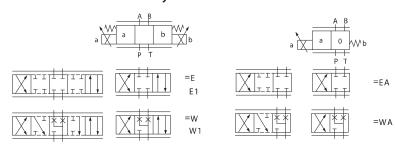

#### **Dimensions**







Model	А	В	С	D	E
4WRA6	171	250	78	47	47
4WRA10	205	285	100	70	68

